

UNIVERSITI TEKNOLOGI MALAYSIA

BORANG PENGESAHAN STATUS TESIS ♦

JUDUL: THE EFFECT OF ECCENTRICITY AT BEAM SUPPORT
TO BEAM STIFFNESS

SESI PENGAJIAN: 2005/2006

Saya AHMAD ZURISMAN BIN MOHD ALI
(HURUF BESAR)

mengaku membenarkan tesis (~~PSM/Sarjana/Doktor Falsafah~~)* ini disimpan di Perpustakaan Universiti Teknologi Malaysia dengan syarat-syarat kegunaan seperti berikut:

1. Tesis adalah hakmilik Universiti Teknologi Malaysia.
2. Perpustakaan Universiti Teknologi Malaysia dibenarkan membuat salinan untuk tujuan pengajian sahaja.
3. Perpustakaan dibenarkan membuat salinan tesis ini sebagai bahan pertukaran antara institusi pengajian tinggi.
4. ** Sila tandakan (✓)

SULIT

(Mengandungi maklumat yang berdarjah keselamatan atau kepentingan Malaysia seperti yang termaktub di dalam AKTA RAHSIA RASMI 1972)

TERHAD

(Mengandungi maklumat TERHAD yang telah ditentukan oleh organisasi/badan di mana penyelidikan dijalankan)

TIDAK TERHAD

Disahkan oleh



(TANDATANGAN PENULIS)



(TANDATANGAN PENYELIA)

Alamat tetap:

45 JALAN 4A,

AMPANG JAYA,

68000 SELANGOR DARUL EHSAN

DR REDZUAN ABDULLAH

Nama Penyelia

Tarikh: OKTOBER 2005

Tarikh: OKTOBER 2005

CATATAN:

* Potong yang tidak berkenaan.

** Jika tesis ini SULIT atau TERHAD, sila lampirkan surat daripada pihak berkuasa/organisasi berkenaan dengan menyatakan sekali sebab dan tempoh tesis ini perlu dikelaskan sebagai SULIT atau TERHAD.

♦ Tesis dimaksudkan sebagai tesis bagi Ijazah Doktor Falsafah dan Sarjana secara penyelidikan, atau disertasi bagi pengajian secara kerja kursus dan penyelidikan, atau Laporan Projek Sarjana Muda (PSM).

“I/~~we~~* hereby declare that I/~~we~~* have read through this project report and in my/~~our~~* opinion this project report is sufficient in terms of scope and quality for the award of the degree of Master of Engineering (Civil - Structure)”

Signature	:	
Supervisor	:	Dr. Redzuan Abdullah
Date	:	October 2005

* *Delete as necessary*

THE EFFECT OF ECCENTRICITY AT BEAM SUPPORT TO BEAM STIFFNESS

AHMAD ZURISMAN BIN MOHD ALI

A project report submitted in partial fulfillments of the
requirements for the award of the degree of
Master of Engineering (Civil - Structure)

Faculty of Civil Engineering
Universiti Teknologi Malaysia

OCTOBER 2005

I declare that my project report entitled "*The Effect of Eccentricity at Beam Support to Beam Stiffness*" is the result of my own research except as cited in references. The project report has not been accepted for any degree and is not concurrently submitted in candidature of any other degree.

Signature : 

Name : Ahmad Zurisman bin Mohd Ali

Date : October 2005

To my beloved sister, brothers and relatives, thanks for endless support.

To my parents, Allahyarhamah Hj Rahimah Sulaiman and Allahyarham Mohd Ali Napiah, our wonderful memories together were the inspiration for me to move forward.

Last but not least for special one, Siti Nazahiyah, thanks for everything...

Acknowledgement

Alhamdulillah, in completion of this projet report, i'm blessed with so many contacts which provide useful guidance. I wish to express my highest gratitude to my supervisor Dr Redzuan Abdullah from Structure and Material Department, Faculty of Civil Engineering, Universiti Teknologi Malaysia, for his wonderful ideas, guidances, advises, critics and encouragement.

I'm also indebted to Kolej Universiti Teknologi Tun Hussein Onn (Kuittho) for providing the opportunity and funding me to further my study. Appreciation for lecturers in Faculty of Civil Engineering, Universiti Teknologi Malaysia for marvellous learning experience.

To my fellow graduates students,my housemates, colleagues and others, thank you so much for moral support and encouragement throughout my entire study.

ABSTRACT

A beam reacts to loading through bending action. Therefore, beam bending stiffness can be represented by deflection. Theoretically, beam stiffness is governed by span length, elastic modulus, moment of inertia and support type. In the analytical analysis, beams are assumed simply supported or fixed supported. However, based on real cases and lab experiments there are other factors that are not included in the theoretical equation but have an effect on the beam stiffness. Factors such as eccentricity between the beam neutral axis and beam support (vertical eccentricity), pour stop stiffness in composite beam/slab effect and column size effect were analyzed in this study. The effects were studied using plane stress element finite element. Pour stop stiffness was modelled using spring element. From the analysis, vertical eccentricity does not give a significant effect on beam stiffness and it can be neglected. The pour stop provides a stiffness of 25000kN/m at the outer support. Beam deflection is independent of column deflection when column width is three times bigger than beam depth.

ABSTRAK

Rasuk bertindak balas terhadap pembebanan melalui lenturan. Oleh itu, kekukuhan lenturan rasuk boleh diwakili oleh pesongan. Secara teori, kekukuhan rasuk dipengaruhi oleh panjang rentang rasuk, modulus elastik, momen sifat tekun dan jenis penyokong. Di dalam analisis, rasuk dianggap disokong secara sokong mudah atau sokong tegar. Bagaimanapun, terdapat beberapa faktor yang mempengaruhi kekukuhan rasuk yang tidak termasuk di dalam persamaan teori berdasarkan kes-kes sebenar dan eksperimen makmal. Faktor seperti kesipian antara paksi neutral rasuk dan penyokong (kesipian tegak), kekukuhan acuan hujung rasuk pada papak komposit, dan saiz tiang di analisis dalam kajian ini. Kesan-kesan ini di kaji dengan menggunakan tegasan satah unsur terhingga. Acuan hujung di model dengan menggunakan unsur spring. Daripada analisis unsur terhingga, didapati bahawa kesipian menegak tidak memberi impak yang signifikan terhadap kekukuhan rasuk dan ianya boleh diabaikan. Acuan hujung mempunyai nilai kekukuhan sebanyak 25000kN/m pada bahagian luar penyokong papak komposit. Pesongan rasuk tidak dipengaruhi oleh pesongan tiang apabila lebar tiang bersamaan tiga kali kedalaman rasuk.

CHAPTER 1

INTRODUCTION

1.1 Background of the research

Beam is a main element in structural system. It is horizontal member that carries load through bending (flexure) action. Therefore, beam will deflect when it is loaded. Beam transfers the loading from slab to columns walls or girders. Generally, beam carry gravitational loads but can also be used to carry horizontal loads (i.e. loads due to a gust of wind or an earthquake).

Beams are characterized by their profile (shape of their cross section) their length and their material. In contemporary construction, beams are typically made of steel, reinforced concrete or wood. One of the most common types of steel beam is the I-beam or wide flange beam, commonly used in steel- frame buildings and bridges.

Internally, beams experience both compressive and tensile stress as a result of the loads applied. Under gravity loads, the top of the beam is under compression while the bottom of the beam is under tension, having the middle layer of the beam relatively stress-free.

Beam will deflect when it is loaded. Deflection is an important issue to the beam. Large deflection could lead to beam failure (Ahmad, 1999). There are several methods that can be used for beam analysis. The methods include Double Integration Method, MacCaulay Method, Moment Area Method, Virtual Work Method, Super Imposed Method, Coupled Beam Method, Energy Method and Castigliano Theorem (Ishak and Sulaiman, 1999). These methods can be considered as analytical solution. In analytical solution, it is assumed that beam supports were located at the beam neutral axis. On the effect of wide support, there are several composite slab experimental tests that use pour stop or end stop at the edge of the slab or beam. One example of this condition was obtained from Abdullah, R (2004). The pour stop at the outer side of the support may provide some stiffness to bending. While in fixed end condition, beam is rigidly connected to supports such as columns and therefore its stiffness increases.

1.1.1 Beam Support

Generally, there are three types of beam support that are idealized in design and analysis which are roller, pin and fixed.

i) Roller

- Roller provides resistance in one direction only. Figure 1.1 shows roller connection.

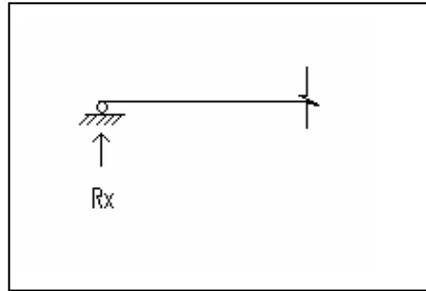


Figure 1.1: Roller Support

ii) Pin

- Pin joint will prevent beam to move in y direction and x direction, but allow beam to rotate. Therefore, no moment induce in this connection.

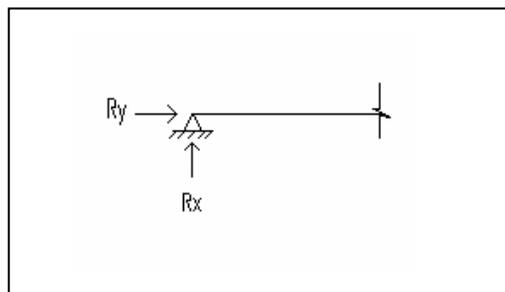


Figure 1.2: Pin Support

iii) Fixed end

- Fixed end provide resistance in both x and y direction and rotation and therefore able to persist moment.

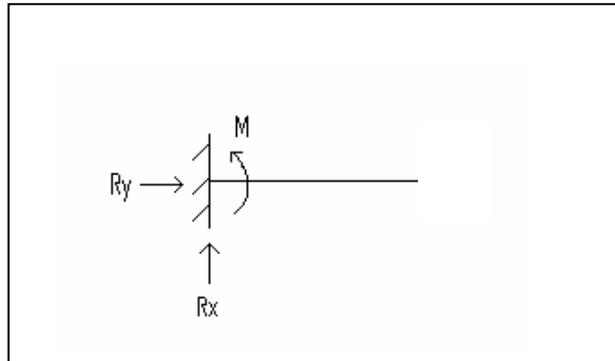


Figure 1.3: Fixed End Support

1.2 Statement of Problem

Traditionally, analytical methods assumed beams to be supported at their neutral axes. In these methods, eccentricity between beam support and beam neutral axis is neglected. However, in most bending tests, beam specimens are supported at the bottom face. This produces a vertical eccentricity between beam support and beam neutral axis. Beams are also rested on wide support as oppose to point supports. Pour stops were introduced at the outer side of support in most of composite slab test. For monolithically joint beam, column size effect beam stiffness. What are the effects of the eccentricity, support width and column size to beam stiffness?

1.2 Objectives

The objectives of this project are

- i) To determine the effect of eccentricity between beam support and neutral axis to beam stiffness.
- ii) To determine the effect of wide support as oppose to point support.
- iii) To determine the effect of column size to beam stiffness.

1.4 Scope of Work

The scope of the work carried out in this study is limited to:

- i) Linear stress analysis of hypothetical beams
- ii) The models are 2-D Finite Element in plane stress condition, using linear elastic materials
- iii) Beam and column materials were made from concrete unless stated.
- iv) Analysis are performed to examine
 - The effect of vertical eccentricity at support.
 - The effect of restraining the beam, ends at supports on the beam stiffness.
 - The effect of column beam size to stiffness.